




ASUS Q302L Back Case Replacement

Written By: Kerolus Gerges

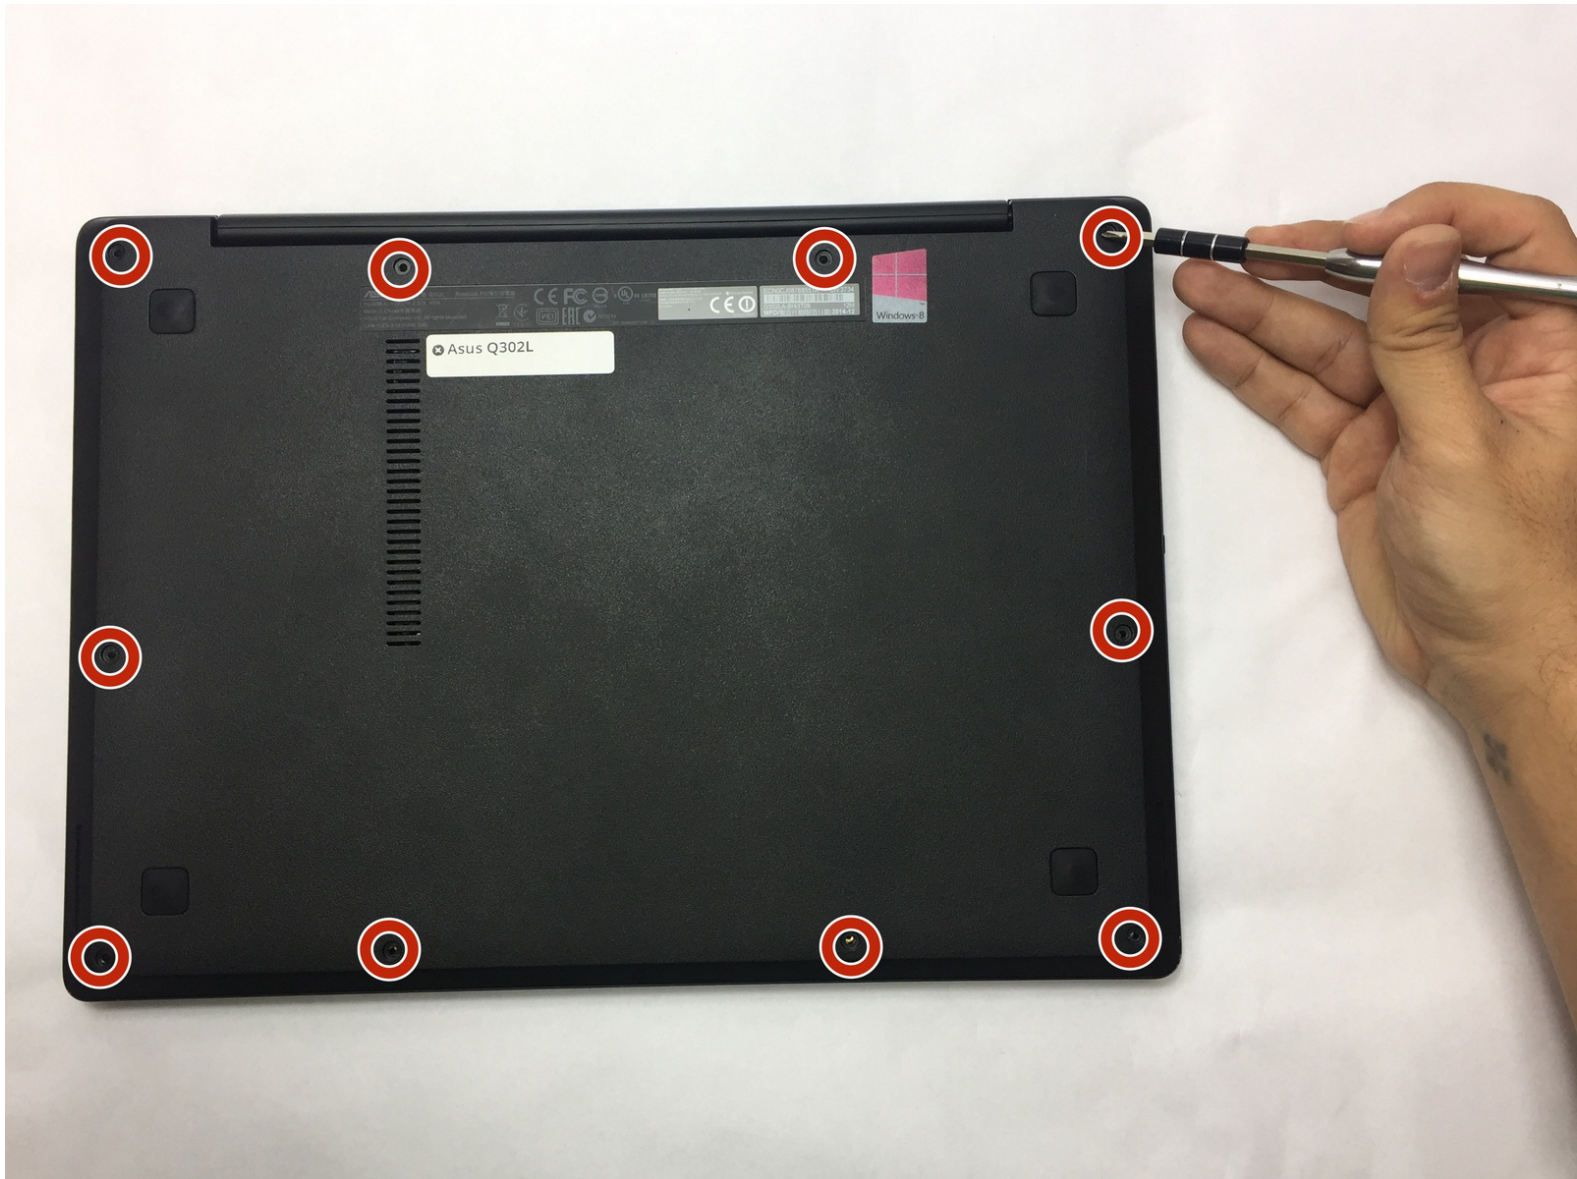

INTRODUCTION


Prerequisite Only



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-


Step 1 — Back Case

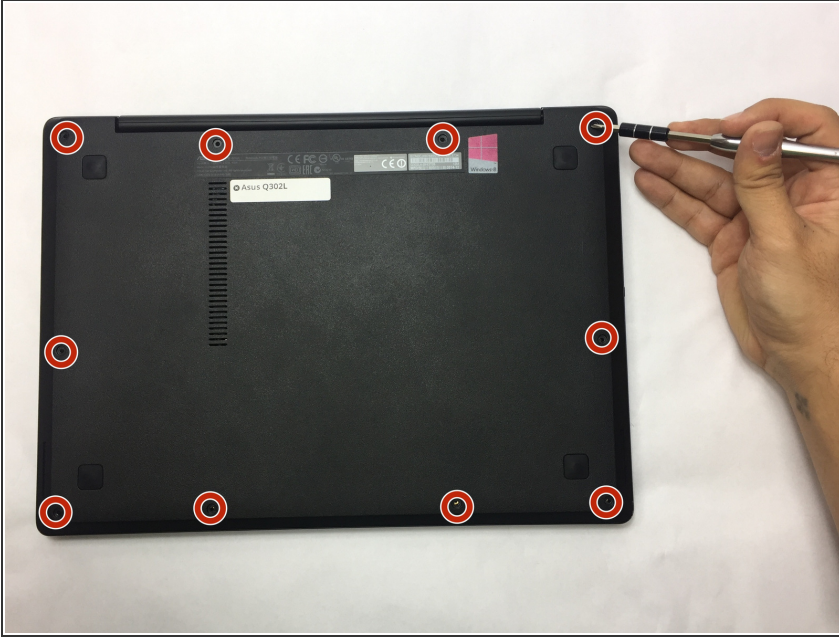

- Use a Philips head screw driver to remove all the screws around the back of the laptop

⚠ Make sure the laptop is disconnected from a power supply and is **TURNED OFF**

Step 2

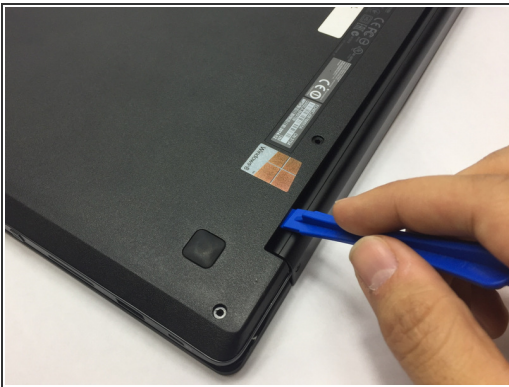

- Wedge a plastic prying tool on the left or right on the back side of the laptop
- Push down on the prying tool till you hear the clips pop out of place and the cover starts to open
- Repeat the second step along the entire back of the laptop till all the clips pop out of place

Step 3



- Once the cover is free from all the clips, you can now safely remove the cover completely off the laptop

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-21 01:35:28 AM.